
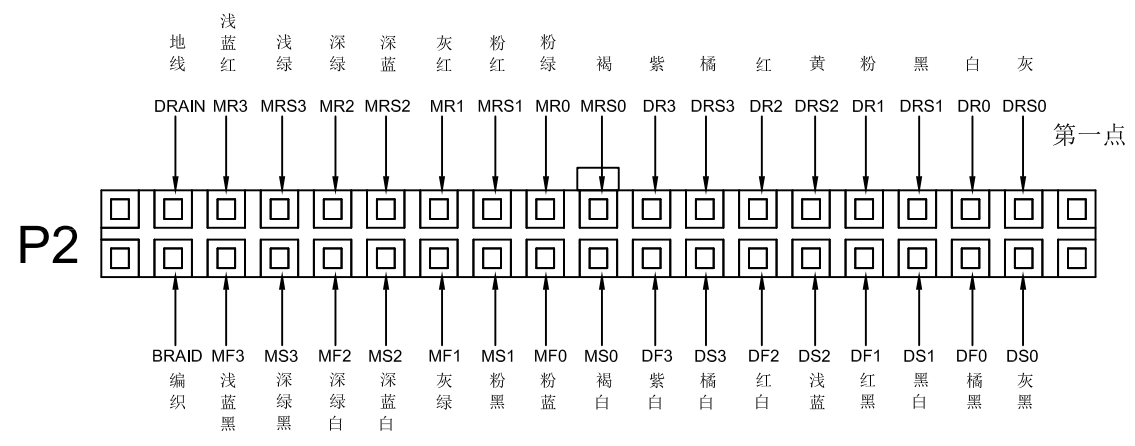
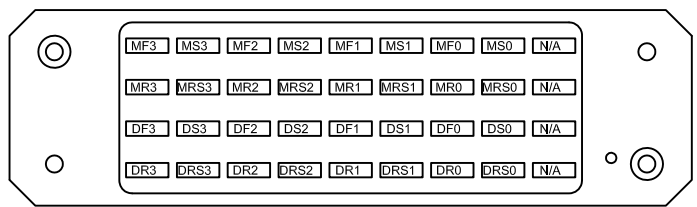



PART NO.

REVISIONS				
LTR	ECR NO.	DESCRIPTION	DATE	APPROVED
A		Initial Release for Manufacture	Sep.12.15	Bryant
B	16003	Change the view	Jan.05.15	Bryant

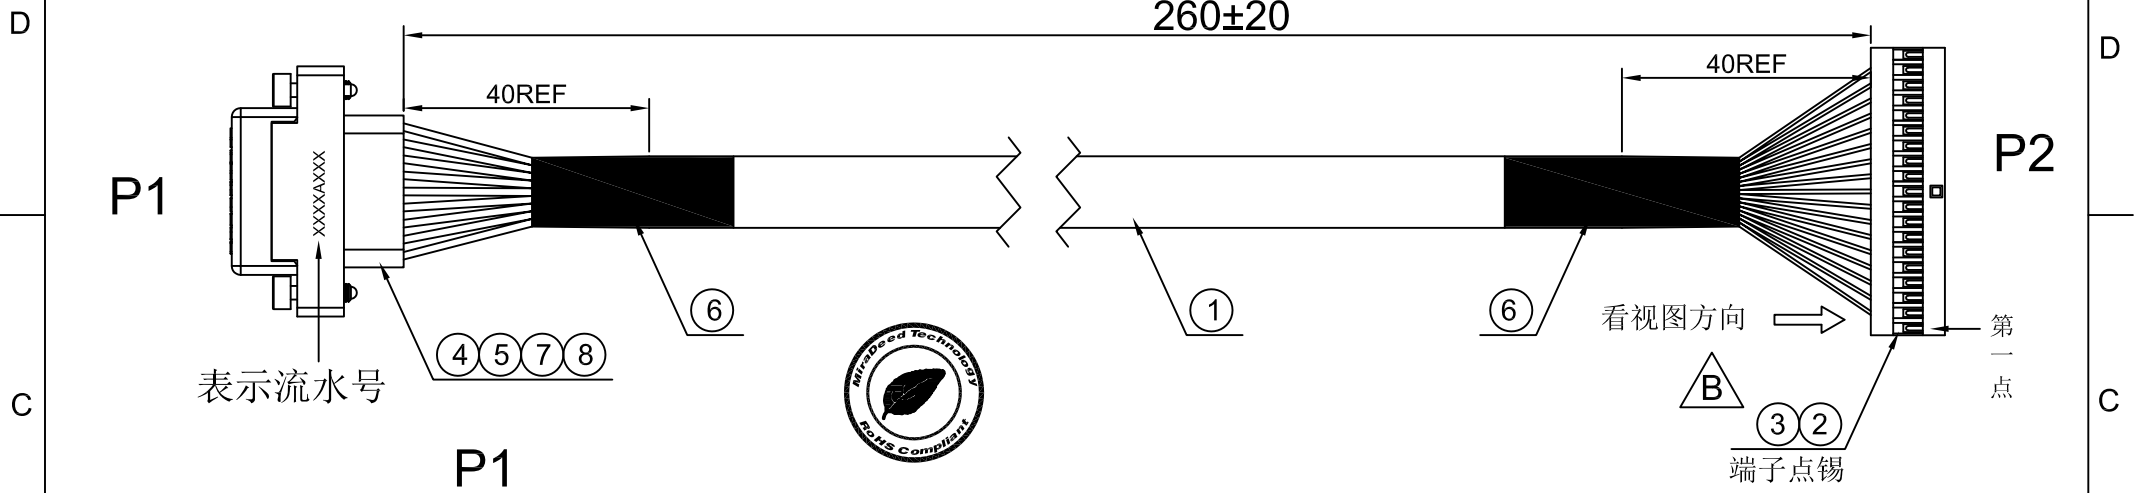

ELECTRICAL TEST :

1. OPEN/SHORT:100%.
2. INSULATION RESISTANCE: 10 Mohm(MIN).
3. CONTACT RESISTANCE: 1 ohm (MAX).
4. HI-POT:DC 300V/10ms .



9	4-22-0127-442801	UL LABEL(ORANGE) ISSUE NO.XXXXX	/	PCS
8	2-71-A099-001501	E-120 (AB膠)	10	G
7	2-71-A102-001501	COAXIAL 銅 (RNZB-1030406-E02)	34	PCS
6	4-15-0021-200201	Heat shrink tube \varnothing 12.0mm BLACK	30.0*2	mm
5	2-71-A098-001501	S200 DCM POGO BLOCK (RNZB-1030406-F01)	1	PCS
4	2-71-A097-001501	S200 DCM 焊線包覆罩 (RNZB-1030406-D01)	1	PCS
3	4-19-A471-A2541T	JYC A2541T3B-00 AU Terminal G/F Wire:22#~28# OD:1.7mm(Max)	34	PCS
2	4-19-B486-254219	JYC A2542 2*19P PH:2.54 帶高凸点	1	PCS
1	1-51-0248-200201	UL2990 26#18P+ADB OD:11.0 BLACK	290.0	mm
NO	PART NO	DESCRIPTION	QTY	UNIT

APPROVALS DRAWN	DATE	MD MiraDeed Technology			
	INSPECTED		DIGITAL POGO CABLE 260MM		
	CHECKED				
DIMENSION TOLERANCES ARE :		SIZE C	SCALE : XX : XX	DRAWING NO. 5703230	REV. B
DO NOT SCALE DRAWING		FORM NO.		SHEET 1 OF 2	