


PART NO.


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	Initial Release for Manufacture	Sep.12.15	Bryant

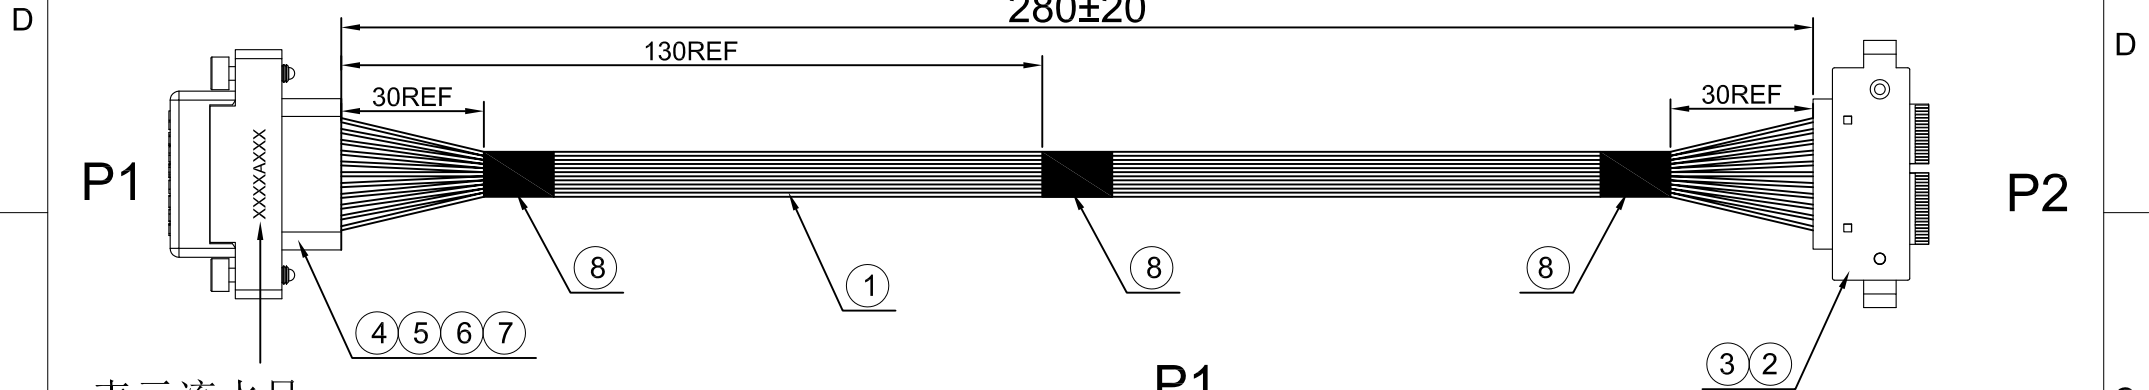

表示流水号



S为芯线G为缠绕

接點為1接1地線全部短路




ELECTRICAL TEST :

1. OPEN/SHORT:100%.
2. INSULATION RESISTANCE: 10 Mohm(MIN).
3. CONTACT RESISTANCE: 1 ohm (MAX).
4. HI-POT:DC 300V/10ms .

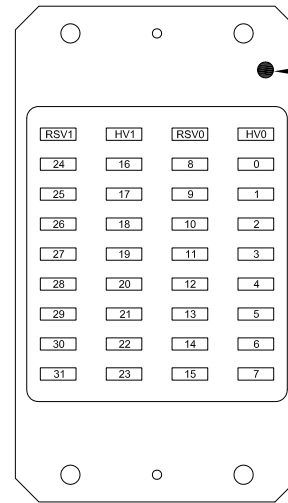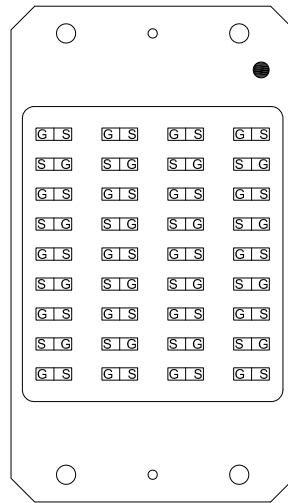

white point

P2

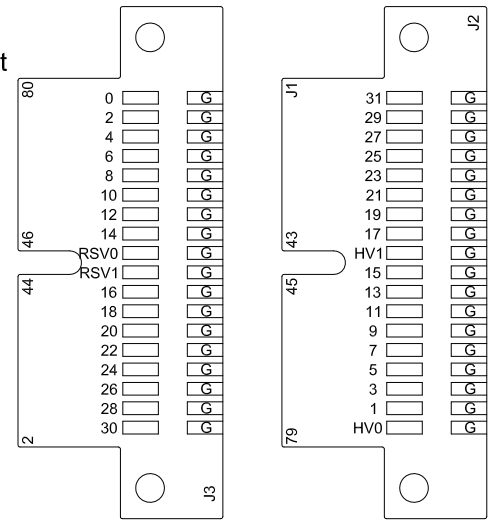

9	4-22-0127-442801	UL LABEL(ORANGE) ISSUE NO.XXXXX	/	PCS
8	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0*3	MM
7	2-71-A099-001501	E-120 (AB膠)	10	G
6	2-71-A104-001501	S200 DIGITAL POGO BLOCK (RNZB-1030406-E01)	1	PCS
5	2-71-A103-001501	S200 DIGITAL 焊線包覆罩 (RNZB-1030406-C01)	1	PCS
4	2-71-A102-001501	COAXIAL 銅 (RNZB-1030406-E02)	72	PCS
3	2-71-A101-001501	DIGITAL PCB	1	PCS
2	2-71-A100-001501	DIGITAL PCB 線架	1	PCS
1	1-60-0078-200201	同軸高頻線SP-V-318	300.0*36	mm
NO	PART NO	DESCRIPTION	QTY	UNIT

APPROVALS		DATE				
DRAWN						
INSPECTED			DIGITAL POGO CABLE 280MM			
CHECKED						
DIMENSION TOLERANCES ARE : DECIMALS ANGLES .XX ± ± .XXX ±			SIZE	SCALE :	DRAWING NO.	REV.
DO NOT SCALE DRAWING			C	XX : XX	5703229	A
			FORM NO.			SHEET 1 OF 2