

4

3


2

1


PART NO. MD-6704092

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	Apr.21.15	Tony

D

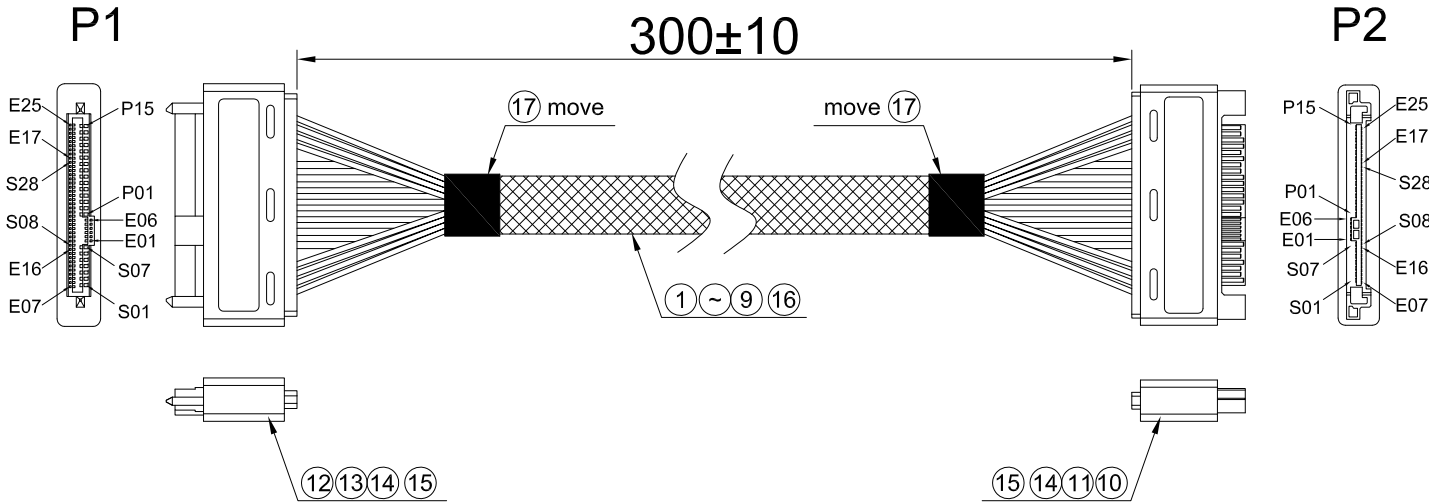

PIN ASSIGNMENT

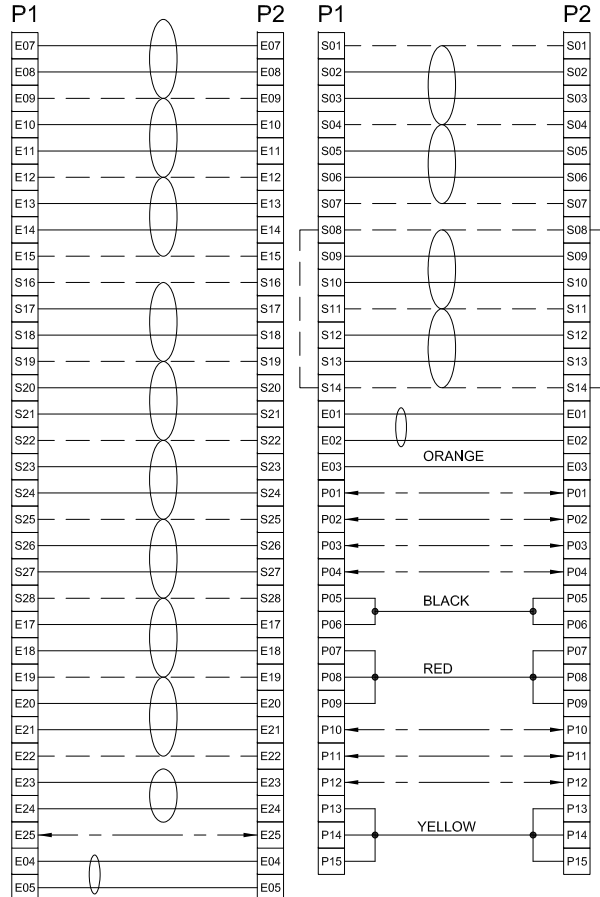

D

C

B

A

C

B

A

ELECTRICAL TEST:

1. OPEN & SHORT TEST
2. CONNECTION RESISTANCE:1M ohm(max)
3. INSULATION RESISTANCE:20M ohm(min)
4. HI-POT TEST: 300V DC/10ms



Legend:

- :High-Speed Serial Differential Pairs
- :Signal Return
- :Sideband Signal

17	4-20-0061-004001	ACETATE TAPE BLACK W=40mm	80.0*2	mm
16	4-15-0044-001001	NYLON BRAID W=10.0MM <BLACK> 1*72	200.0	mm
15	3-02-0001-532151	PE	10	G
14	3-01-0033-005001	PVC BLACK 50P(UL94V-0)	15	G
13		8639 FEMALE CONN PH:1.27	1	PCS
12		8639 FEMALE PCB	1	PCS
11		8639 MALE CONN PH:1.27	1	PCS
10		8639 MALE PCB	1	PCS
9	1-57-0013-610205	UL 1007 18# OD:2.1mm YELLOW	310.0	mm
8	1-57-0011-610203	UL 1007 18# OD:2.1mm RED	310.0	mm
7	1-57-0012-610201	UL 1007 18# OD:2.1mm BLACK	310.0	mm
6	1-57-0078-100704	UL1007 26AWG ORANGE OD:1.3mm	310.0	mm
5	1-58-0030-200209	SINGLE WIRE LINE: 30 # *4 C PH 0.8 MM GRAY (NON - UL)	310.0*2	mm
4	1-61-0052-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE04(Non UL)	310.0*4	mm
3	1-61-0051-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE03(Non UL)	310.0*4	mm
2	1-61-0050-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE02(Non UL)	310.0*4	mm
1	1-61-0049-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE01(Non UL)	310.0*4	mm

Miradeed	APPROVALS	DATE
	DRAWN Huang.Yang	Apr.21.15
	CHECKED Zeng.WeI	Apr.21.15
APPROVAL:		DATE
Zeng.WeI		Apr.21.15

<b>MD MiraDeed Technology</b>			
8639 MALE TO FEMALE CABLE 300MM			
SIZE	SCALE:	DRAWING NO.	REV.
C	XX : XX	6704092	A0
ID NO.			SHEET 1 OF 1

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
-----	----------	-------------	------	------

4

3

2

1